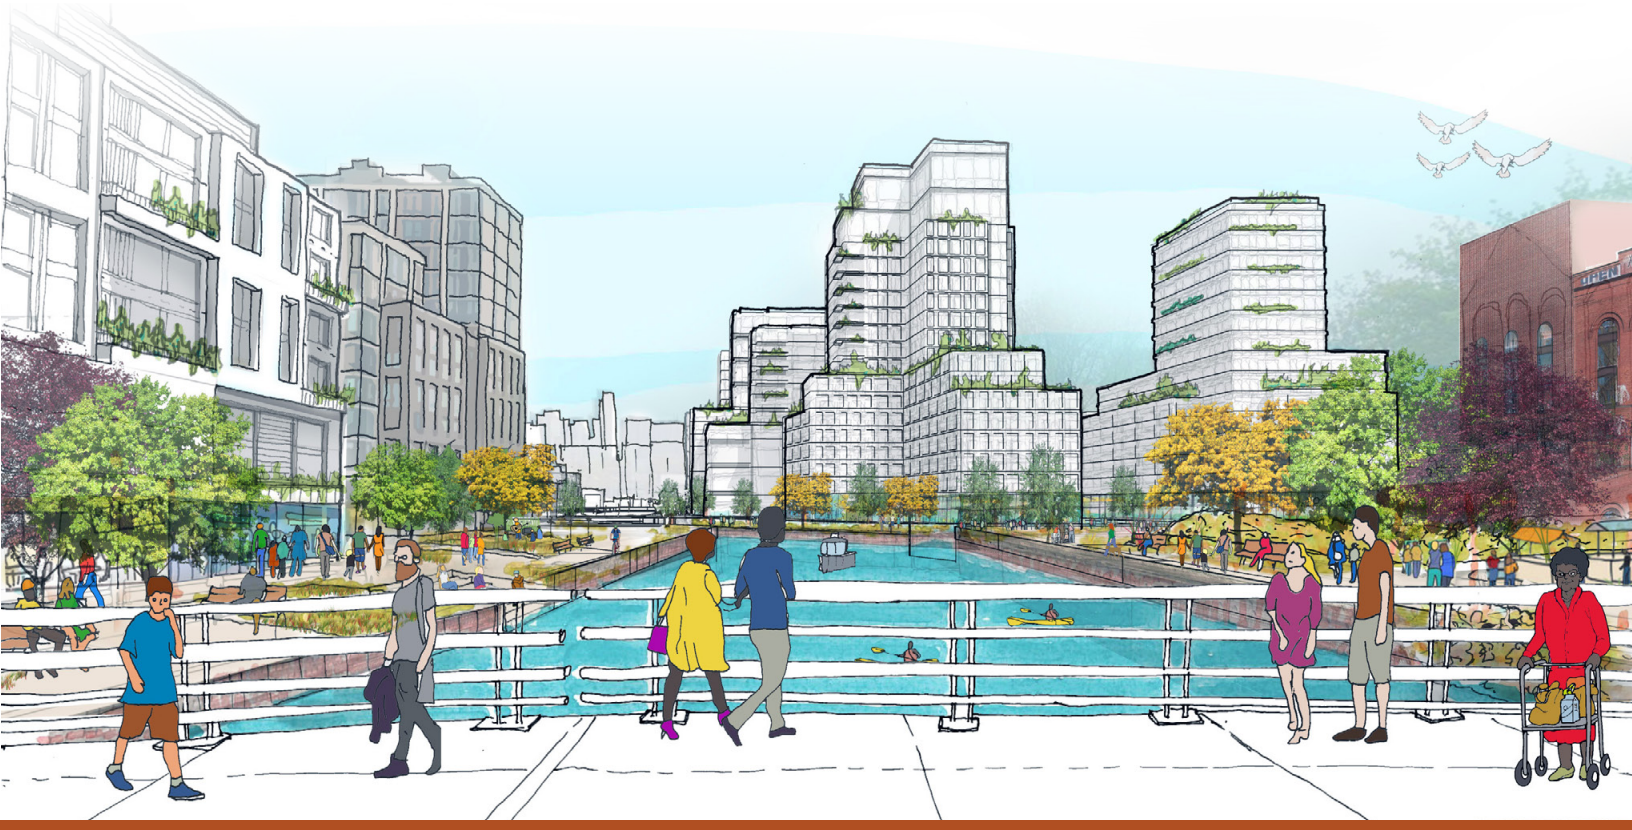


Gowanus Neighborhood Rezoning and Related Actions

Draft Environmental Impact Statement
CEQR # 19DCP157K

prepared by:
New York City Department of City Planning
120 Broadway, 31st Floor
New York, NY 10271

with assistance of:
AKRF
440 Park Ave South, 7th Floor
New York, NY 10016

and
Philip Habib and Associates
102 Madison Avenue 11th floor
New York, NY 10016

April 2021

Gowanus Neighborhood Rezoning and Related Actions
DRAFT ENVIRONMENTAL IMPACT STATEMENT (DEIS)

April 19, 2021

CEQR No.:	19DCP157K
ULURP Nos.	Gowanus Neighborhood Rezoning and Related Actions 210177 ZMK, N 210178 ZRK, 210052 HAK, 210053 PPK, 210179 MMK, and 210180 MMK
Project Location:	Brooklyn, New York Community Districts 2 and 6
Lead Agency:	City Planning Commission, City of New York Marisa Lago, Chair
Lead Agency Contact:	Olga Abinader, Director Environmental Assessment and Review Division NYC Department of City Planning 120 Broadway, 31st floor New York, NY 10271-3100 (212) 720-3493
Prepared for:	New York City Department of City Planning Winston Von Engel Brooklyn Office Glen A. Price III, Director Studies Implementation New York City Department of City Planning
Prepared by:	AKRF, Inc. Philip Habib & Associates

A public hearing on the Draft Environmental Impact Statement (DEIS) will be held at a later date to be announced. Advance notice will be given of the time and place of the hearing. Written comments on the DEIS are requested and will be received and considered by the Lead Agency until the 10th calendar day following the close of the public hearing.

The DEIS is available on the website of the New York City Department of City Planning: http://www1.nyc.gov/site/planning/applicants/eis-documents.page

Table of Contents

Executive Summary **S-1**

1: Project Description **1-1**
A. Introduction 1-1
B. Required Approvals and Review Procedures 1-3
C. Background to the Proposed Actions 1-4
Study Area History 1-4
Community Engagement and Interagency Participation 1-7
Project Area 1-9
Prior Planning Efforts 1-13
D. Existing Zoning 1-15
M1-1 & M1-2 1-16
M2-1 1-17
M3-1 1-17
C8-2 1-18
R6 1-18
R6b 1-18
R8a 1-19
M1-4/R7-2 1-19
Waterfront Zoning 1-19
Commercial Overlays 1-19
Special Enhanced Commercial District 1-20
E. Purpose and Need for the Proposed Actions 1-20
Detailed Objectives of the Proposed Actions 1-23
F. Description of the Proposed Actions 1-28
Proposed Zoning Map Amendments 1-30
Proposed Zoning Text Amendments 1-34
Proposed City Map Amendments 1-40
Waterfront Revitalization Program (Wrp) 1-41
Actions Necessary to Support the Gowanus Green Development 1-41
Other Actions That Would Affect the Project Area 1-43
G. Analysis Framework 1-43
Reasonable Worst-Case Development Scenario 1-43
The Future Without the Proposed Actions (No Action Condition) 1-47
The Future With the Proposed Actions (With Action Condition) 1-49
H. Public Review Process 1-51
Uniform Land Use Review Procedure 1-51
New York City Environmental Quality Review 1-51

2: Land Use, Zoning, and Public Policy 2-1
A. Introduction 2-1
Principal Conclusions 2-2
B. Methodology 2-3
Study Areas 2-4
C. Existing Conditions 2-4
Land Use 2-4
Zoning 2-12
Public Policy 2-19
D. The Future Without the Proposed Actions (No Action Condition) 2-27
Land Use 2-27
Zoning 2-33
Public Policy 2-34
E. The Future With the Proposed Actions (With Action Condition) 2-34
Land Use 2-34
Zoning 2-36
Proposed Zoning Text Amendments 2-42
Proposed City Map Amendments 2-48
Public Policy 2-49
F. Assessment 2-49
Land Use and Zoning 2-49
Public Policy 2-53

3: Socioeconomic Conditions 3-1
A. Introduction 3-1
Principal Conclusions 3-1
B. Methodology 3-4
Determining Whether A Socioeconomic Assessment Is Appropriate 3-5
Analysis Format 3-7
Study Area Definition 3-8
Data Sources 3-10
C. Preliminary Assessment 3-11
Direct Business Displacement 3-11
Indirect Residential Displacement 3-19
Indirect Business Displacement 3-27
Adverse Effects On Specific Industries 3-30
D. Detailed Analysis of Indirect Residential Displacement 3-31
Existing Conditions and Trends 3-31
The Future Without the Proposed Actions (No Action Condition) 3-40
The Future With the Proposed Actions (With Action Condition) 3-42

4: Community Facilities and Services 4-1
A. Introduction 4-1
Principal Conclusions 4-1
B. Preliminary Screening 4-3
Direct Effects 4-3
Indirect Effects 4-4
C. Potential Indirect Effects On Public Elementary, Intermediate, and High Schools 4-4

Methodology 4-4
Existing Conditions 4-5
The Future Without the Proposed Actions 4-7
The Future With the Proposed Actions 4-9
D. Potential Indirect Effects On Public Libraries 4-11
Methodology 4-11
Existing Conditions 4-12
The Future Without the Proposed Actions 4-13
The Future With the Proposed Actions 4-14
E. Potential Indirect Effects On Early Childhood Programs 4-16
Methodology 4-16
Existing Conditions 4-17
The Future Without the Proposed Actions 4-18
The Future With the Proposed Actions 4-19
F. Health Care Facilities 4-20
Methodology 4-20
Existing Conditions 4-20
G. Police and Fire Services 4-23
Methodology 4-23
Existing Conditions 4-23

5: Open Space 5-1
A. Introduction 5-1
Principal Conclusions 5-2
B. Methodology 5-3
Direct Effects 5-3
Indirect Effects 5-3
C. Existing Conditions 5-6
Study Area Population 5-6
Inventory of Publicly Accessible Open Spaces 5-9
Assessment of Open Space Adequacy 5-16
D. The Future Without the Proposed Actions (No Action Condition) 5-18
Study Areas 5-18
Open Space Resources 5-19
Assessment of Open Space Adequacy 5-21
E. The Future With the Proposed Actions (With Action Condition) 5-25
Direct Effects 5-25
Indirect Effects 5-25
Open Space Resources 5-25
Assessment of Open Space Adequacy 5-27
Determining Impact Significance 5-30

6: Shadows 6-1
A. Introduction 6-1
Principal Conclusions 6-1
B. Definitions and Methodology 6-1
Definitions 6-1
Methodology 6-2

C. Preliminary Screening Assessment 6-3
Tier 1 Screening Assessment 6-3
Tier 2 Screening Assessment 6-4
Tier 3 Screening Assessment 6-4
D. Detailed Shadow Analysis 6-6
Overview of Analysis Results 6-6
Determination of Impact Significance 6-6
Community Gardens 6-24
Historic Resources 6-27
Project-Generated Open Spaces 6-31
NYCHA Open Spaces 6-33
Natural Resources 6-36
E. Conclusions 6-38

7: Historic and Cultural Resources 7-1
A. Introduction 7-1
B. Principal Conclusions 7-1
Archaeological Resources 7-1
Architectural Resources 7-3
C. Development Background 7-4
D. Methodology 7-6
Archaeological Resources 7-6
Architectural Resources 7-7
E. Existing Conditions 7-10
Archaeological Resources 7-10
Architectural Resources 7-16
F. The Future Without the Proposed Actions 7-38
Archaeological Resources 7-38
Architectural Resources 7-44
G. The Future With the Proposed Actions 7-50
Overview 7-50
Archaeological Resources 7-50
Architectural Resources 7-53

8: Urban Design and Visual Resources 8-1
A. Introduction 8-1
Principal Conclusions 8-2
B. Methodology 8-3
C. Existing Conditions 8-5
Primary Study Area 8-5
Secondary Study Area 8-20
D. The Future Without the Proposed Actions (No Action Condition) 8-28
Primary Study Area 8-29
Secondary Study Area 8-30
E. The Future With the Proposed Actions (With Action Condition) 8-31
Primary Study Area 8-31
Secondary Study Area 8-41

9: Natural Resources 9-1
A. Introduction 9-1
Principal Conclusions 9-2
B. Methodology 9-2
Study Area and Analysis Techniques 9-2
Regulatory Context 9-3
C. Existing Conditions 9-5
Groundwater 9-5
Floodplains 9-6
Wetlands 9-6
Aquatic Resources 9-6
Terrestrial Resources 9-13
Threatened, Endangered, and Special Concern Species 9-15
D. The Future Without the Proposed Actions (No Action Condition) 9-17
Superfund Remediation 9-17
Gowanus Cso Facilities and Unified Stormwater Rule 9-18
1st and 5th Street Turning Basins 9-18
Capital Improvements 9-18
Development 9-19
E. The Future With the Proposed Actions (With Action Condition) 9-20
Groundwater 9-20
Floodplains 9-20
Wetlands 9-21
Aquatic Resources 9-21
Terrestrial Resources 9-22
Threatened, Endangered, and Special Concern Species 9-22
F. References 9-23

10: Hazardous Materials 10-1
A. Introduction 10-1
Principal Conclusions 10-1
B. Methodology 10-2
Sanborn Fire Insurance Map Review 10-2
Database Review 10-3
Site Reconnaissance 10-3
C. Existing Conditions 10-4
Topography and Hydrogeology 10-4
Overview of Historical Uses 10-4
D. The Future Without the Proposed Actions 10-17
E. The Future With the Proposed Actions 10-18
Demolition/Renovation 10-19
Subsurface Disturbance 10-19
F. Conclusion 10-21

11: Water and Sewer Infrastructure 11-1
A. Introduction 11-1
Existing On-Site Stormwater Management Requirements and Proposed Unified Stormwater Rule 11-1

Principal Conclusions 11-2
B. Methodology 11-4
C. Preliminary Analysis 11-5
Existing Conditions 11-5
The Future Without the Proposed Actions (No Action Condition) 11-10
The Future With the Proposed Actions (With Action Condition) 11-15
D. Detailed Cso and Flooding Analysis 11-21
Detailed Drainage Analysis Methodology 11-21
Detailed Analysis Findings 11-23
E. Stormwater Best Management Practices 11-25

12: Solid Waste 12-1
A. Introduction 12-1
Principal Conclusions 12-1
B. Methodology 12-2
C. Existing Conditions 12-2
Description of Current Solid Waste Sanitation Services 12-2
Solid Waste Generation On Projected Development Sites 12-4
D. The Future Without the Proposed Actions 12-5
E. The Future With the Proposed Actions 12-6

13: Energy 13-1
A. Introduction 13-1
Principal Conclusions 13-1
B. Methodology 13-2
C. Existing Conditions 13-2
Energy Supply and Transmission 13-2
Recent Energy Conservation Directives 13-3
Existing Demand 13-4
D. The Future Without the Proposed Actions 13-4
E. The Future With the Proposed Actions 13-5

14: Transportation 14-1
A. Introduction 14-1
B. Principal Conclusions 14-3
Traffic 14-3
Transit 14-3
Vehicular and Pedestrian Safety 14-7
Parking 14-7
C. Preliminary Analysis Methodology 14-8
D. Level 1 Screening Assessment 14-8
Background 14-9
Transportation Planning Factors 14-9
Travel Demand Forecast 14-9
E. Level 2 Screening Assessment 14-16
Vehicular Traffic 14-16
Transit 14-16
Pedestrians 14-20

Parking 14-20
F. Transportation Analyses Methodologies 14-21
Traffic 14-21
Transit 14-22
Pedestrians 14-25
Vehicular and Pedestrian Safety Evaluation 14-28
Parking 14-29
G. Traffic 14-29
Existing Conditions 14-29
The Future Without the Proposed Actions (No Action Condition) 14-33
The Future With the Proposed Actions (With Action Conditions) 14-36
H. Transit 14-49
Existing Conditions 14-49
The Future Without the Proposed Actions (No Action Condition) 14-55
The Future With the Proposed Actions (With Action Condition) 14-60
I. Pedestrians 14-65
Existing Conditions 14-65
The Future Without the Proposed Actions (No Action Condition) 14-66
The Future With the Proposed Actions (With Action Condition) 14-72
J. Vehicular and Pedestrian Safety Evaluation 14-84
Recent Dot Initiatives 14-84
Study Area High Crash Locations 14-85
School Safety Measures 14-88
K. Parking 14-88
Existing Conditions 14-88
The Future Without the Proposed Actions (No Action Condition) 14-90
The Future With the Proposed Actions (With Action Condition) 14-93

15: Air Quality 15-1
A. Introduction 15-1
Principal Conclusions 15-1
B. Pollutants for Analysis 15-2
Carbon Monoxide 15-3
Nitrogen Oxides, VOCs, and Ozone 15-3
Lead 15-4
Respirable Particulate Matter—PM_{10} and $PM_{2.5}$ 15-4
Sulfur Dioxide 15-4
Noncriteria Pollutants 15-5
C. Air Quality Regulations, Standards, and Benchmarks 15-5
National and State Air Quality Standards 15-5
Naaqs Attainment Status and State Implementation Plans 15-7
Determining the Significance of Air Quality Impacts 15-8
D. Methodology for Predicting Pollutant Concentrations 15-10
Mobile Sources 15-10
Stationary Sources 15-15
E. Existing Conditions 15-30
F. The Future Without the Proposed Actions (No Action Condition) 15-30
Mobile Sources 15-30

Stationary Sources 15-31
G. The Future With the Proposed Actions (With Action Condition) 15-32
Mobile Sources 15-32
Stationary Sources 15-34

16: Greenhouse Gas Emissions and Climate Change 16-1
A. Introduction 16-1
Principal Conclusions 16-1
B. Greenhouse Gas Emissions 16-2
Pollutants of Concern 16-2
Policy, Regulations, Standards, and Benchmarks for Reducing GHG Emissions 16-4
Methodology 16-7
Projected Ghg Emissions 16-9
Consistency With the Citywide GHG Reduction Goals 16-11
C. Resilience to Climate Change 16-12
Development of Policy to Improve Climate Change Resilience 16-13
Resilience of the Proposed Project to Climate Change 16-14

17: Noise 17-1
A. Introduction 17-1
Principal Conclusions 17-1
B. Acoustical Fundamentals 17-2
"A"-Weighted Sound Level (dBA) 17-2
Noise Descriptors Used in Impact Assessment 17-3
C. Noise Standards and Criteria 17-3
New York Ceqr Technical Manual Noise Standards 17-3
D. Existing Noise Levels 17-5
Selection of Noise Receptor Locations 17-5
Noise Monitoring 17-5
Existing Noise Levels At Noise Receptor Locations 17-6
E. Noise Prediction Methodology 17-9
General Methodology 17-9
Playground Noise 17-10
F. The Future Without the Proposed Actions 17-10
G. The Future With the Proposed Actions 17-13
Traffic Noise 17-13
Playground Noise 17-13
H. Noise Attenuation Measures 17-16
Manufacturing Use Demising Partition Noise Attenuation Requirements 17-21
I. Mechanical Equipment 17-22

18: Public Health 18-1
A. Introduction 18-1
Principal Conclusions 18-1
B. Gowanus Canal Superfund Site 18-1
C. Public Health Assessment—Construction Noise 18-3
Assessment 18-3

19: Neighborhood Character 19-1
A. Introduction 19-1
Principal Conclusions 19-2
B. Methodology 19-2
Study Area 19-3
C. Preliminary Assessment 19-3
Defining Features 19-4
Assessment of the Potential to Affect the Defining Features of the Neighborhood 19-11
D. Conclusion 19-19

20: Construction 20-1
A. Introduction 20-1
Principal Conclusions 20-2
Governmental Coordination and Oversight 20-5
B. Conceptual Construction Phasing and Schedule 20-6
C. Construction Description 20-6
General Construction Stages 20-7
General Construction Practices 20-8
Number of Construction Workers and Material Deliveries 20-9
D. The Future Without the Proposed Actions (No Action Conditions) 20-10
E. The Future With the Proposed Actions (With Action Condition) 20-11
Transportation 20-11
Air Quality 20-19
Noise 20-26
Vibration 20-68
Other Technical Areas 20-70

21: Mitigation 21-1
A. Introduction 21-1
Principal Conclusions 21-1
Community Facilities 21-6
Early Childhood Programs 21-6
B. Open Space 21-7
C. Shadows 21-8
Our Lady of Peace Church 21-8
Douglass and Degraw Pool in Thomas Greene Playground 21-9
D. Historic and Cultural Resources 21-10
Architectural Resources 21-10
Archaeological Resources 21-10
E. Transportation 21-11
Traffic 21-11
Transit 21-19
Pedestrians 21-21
F. Air Quality 21-27
G. Construction 21-27
Noise Reduction Measures 21-28

22: Alternatives 22-1
A. Introduction 22-1
B. Principal Conclusions 22-1
No Action Alternative 22-1
No Unmitigated Significant Adverse Impacts Alternative 22-2
Lower Density Alternative 22-4
C. No Action Alternative 22-5
Land Use, Zoning, and Public Policy 22-5
Socioeconomic Conditions 22-6
Community Facilities and Services 22-8
Open Space 22-8
Shadows 22-8
Historic and Cultural Resources 22-8
Urban Design and Visual Resources 22-14
Natural Resources 22-14
Hazardous Materials 22-15
Water and Sewer Infrastructure 22-15
Solid Waste and Sanitation Services 22-16
Energy 22-16
Transportation 22-16
Air Quality 22-18
Greenhouse Gas Emissions and Climate Change 22-19
Noise 22-19
Public Health 22-19
Neighborhood Character 22-19
Construction 22-20
D. No Unmitigated Significant Adverse Impacts Alternative 22-20
Community Facilities 22-20
Open Space 22-21
Shadows 22-21
Historic and Cultural Resources 22-22
Transportation 22-24
Construction 22-24
E. Lower Density Alternative 22-25
Land Use, Zoning, and Public Policy 22-27
Socioeconomic Conditions 22-28
Community Facilities and Services 22-28
Open Space 22-28
Shadows 22-29
Historic and Cultural Resources 22-30
Urban Design and Visual Resources 22-30
Natural Resources 22-31
Hazardous Materials 22-31
Water and Sewer Infrastructure 22-31
Solid Waste and Sanitation Services 22-31
Energy 22-32
Transportation 22-32
Air Quality 22-35

Greenhouse Gas Emissions and Climate Change 22-36
Noise 22-36
Public Health 22-36
Neighborhood Character 22-36
Construction 22-37
Mitigation Measures Required for the Lower Density Alternative 22-37

23: Unavoidable Adverse Impacts 23-1
A. Introduction 23-1
B. Community Facilities 23-1
C. Open Space 23-2
D. Shadows 23-2
E. Historic and Cultural Resources 23-4
Architectural Resources 23-4
Archaeological Resources 23-4
F. Transportation 23-5
G. Construction 23-6
Historic and Cultural Resources 23-6
Noise 23-6

24: Growth-Inducing Aspects of the Proposed Actions 24-1

25: Irreversible and Irretrievable Commitments of Resources 25-1

26: Conceptual Analysis 26-1
A. Introduction 26-1
Principal Conclusions 26-2
B. Description of Additional Zoning Mechanisms 26-2
Hotel Special Permit 26-2
School Authorization 26-2
Authorization for Large Mixed-Use Sites 26-3
Transit Improvement Authorization 26-3
C. Methodology and Analysis Framework 26-3
Incremental Development 26-6
Analysis Framework 26-6
D. Environmental Assessment 26-7
Land Use, Zoning, and Public Policy 26-7
Socioeconomic Conditions 26-7
Community Facilities and Services 26-8
Open Space 26-8
Shadows 26-9
Historic and Cultural Resources 26-11
Urban Design and Visual Resources 26-12
Natural Resources 26-13
Hazardous Materials 26-13
Water and Sewer Infrastructure 26-13
Solid Waste and Sanitation Services 26-14
Energy 26-15

Transportation....26-15
Air Quality....26-16
Greenhouse Gas Emissions and Climate Change....26-19
Noise....26-19
Public Health....26-19
Neighborhood Character....26-20
Construction....26-20

LIST OF APPENDICES

Appendix A – Project Description
Appendix A1 – Proposed Text Amendments
Appendix A2 – RWCDS Analysis
Appendix A3 – Blocks and Lots in Rezoning Area
Appendix A4 – Special District Text

Appendix B – Waterfront Revitalization Program
Appendix B1 – No Build Project List
Appendix B2 – WRP, CAF, and WRP Policy Analysis

Appendix C – Historic Resources
Appendix C1 – Historic and Cultural Resources: Phase 1A Report
Appendix C2 – Historic and Cultural Resources: Agency Correspondence

Appendix D – Natural Resources
Appendix D – Natural Resources: Vegetation and Wildlife Tables

Appendix E – Hazardous Materials
Appendix E – Hazardous Materials: EHR Database and Sanborns, Reports 1 and 2

Appendix F – Water and Sewer Infrastructure
Appendix F – Water and Sewer Infrastructure: Boomi Modeling Memo

Appendix G – Transportation
Appendix G1 – TPF and TDF Memo
Appendix G2 – LOS Tables and Parking Regulations

Appendix H – Air Quality
Appendix H – Proposed Air Quality E Designations

Appendix I – Noise

Appendix J - Construction

Appendix K – Alternative RWCDS Analysis

Appendix L – Methodology Memos

List of Tables

S-1 Summary of Existing Allowable Densities—Gowanus Rezoning Area S-16
S-2 Proposed Modification to Certain Districts S-34
S-3 2035 RWCDS No Action and With Action Land Uses S-45
S-4 Number of Impacted Intersections and Lane Groups By Peak Hour S-66
S-5 Summary of Significant Subway Station Impacts S-67
S-6 Summary of Significant Subway Line Haul Impacts S-68
S-7 Summary of Significant Pedestrian Impacts S-69
S-8 High Crash Locations S-69
S-9 Summary of Lane Groups/Intersections With Significant Adverse Traffic Impacts ... S-79
S-10 Lane Groups With Unmitigated Significant Adverse Traffic Impacts S-80
1-1 Summary of Existing Allowable Densities—Gowanus Canal Corridor Rezoning Area 1-16
1-2 Proposed Modification to Certain Districts 1-35
1-3 2035 RWCDS No Action and With Action Land Uses 1-46
2-1 Existing Land Uses Within Primary Study Area 2-5
2-2 Existing Land Uses Within the Canal Corridor Subarea 2-6
2-3 Existing Land Uses Within the 4th Avenue Corridor Subarea 2-7
2-4 Existing Land Uses Within the Industrial and Commercial Subarea 2-8
2-5 Existing Land Uses Within the Residential Subarea 2-9
2-6 Existing Land Uses Within the Upland Mixed-Use Subarea 2-10
2-7 Summary of Existing Allowable Densities – Gowanus Rezoning Area 2-13
2-8 Existing Zoning Districts Within the Secondary Study Area 2-18
2-9 Development Projects in the Future Without the Proposed Actions 2-30
2-10 2035 Rwcds No Action and With Action Land Uses 2-35
2-11 Proposed Modification to Certain Manufacturing Districts 2-42
3-1 2017 Private Employment in Socioeconomic Study Area, Brooklyn, and New York City . 3-12
3-2 2017 Private Businesses in Socioeconomic Study Area, Brooklyn, and New York City 3-14
3-3 Private Businesses and Employment Potentially Displaced By the Proposed Actions 3-15
3-4 Household Income Characteristics (2006-2010, 2014-2018 ACS) 3-20
3-5 NYCHA Developments in the Study Area 3-21
3-6 Average and Median Gross Rents 3-21
3-7 Average Asking Rents in the Study Area 3-22
3-8 2020 New York City Area Median Income (AMI) 3-23

3-9 2020 New York City Affordable Monthly Rents By Area Median Income (AMI) 3-23
3-10 Market Rate Units By Number of Bedrooms 3-24
3-11 Weighted Average Income of With-Action Market-Rate Renters 3-25
3-12 Weighted Average Income of Total With Action Population 3-25
3-13 Study Area Population Estimates and Projections Existing Conditions and Future Without the Proposed Actions 3-26
3-14 With Action Condition Population 3-27
3-15 Existing Land Uses and Incremental Land Uses Under the Proposed Actions Rwcds 3-27
3-16 Household Income Characteristics (2006-2010, 2014-2018 ACS) 3-32
3-17 Household Income Distribution 2018 3-32
3-18 Percentage of Population Living Below Poverty Level 3-33
3-19 Housing Units, Vacancy, and Tenure 3-33
3-20 2018 Housing Units By Year Structure Built 3-34
3-21 Units in Structure 3-35
3-22 Renter-Occupied Housing Units By Gross Rent As Percentage of Household Income ...3-35
3-23 Average Market Rents 3-36
3-24 Certificates of Occupancy and Residential Demolitions 2012-2019 3-37
3-25 Low–Income Renters, Puma 4005 3-38
3-26 Allocation of Low-Income Households, Subarea A 3-39
3-27 Low-Income Renters, Puma 4004 3-39
3-28 Allocation of Low-Income Households, Subarea B 3-40
3-29 No Build Residential Development, Subarea A 3-41
3-30 No Build Residential Development, Subarea B 3-41
4-1 Preliminary Screening Analysis Criteria: Brooklyn 4-4
4-2 Study Area Elementary Schools 4-6
4-3 Study Area Intermediate Schools 4-7
4-4 Study Area High Schools 4-8
4-5 Projected Estimated Number of New Students Introduced by Development in the No Action Condition 4-8
4-6 Projected Estimated Number of New Students Introduced by Development in the With Action Condition 4-10
4-7 Estimated Public School Enrollment, Capacity, and Utilization: With Action Condition ..4-10
4-8 Public Libraries Serving the Study Area 4-12
4-9 Catchment Area Population: No Action Condition 4-14
4-10 Catchment Area Population: With Action Condition 4-15
4-11 Publicly Funded Child Care Facilities Serving the Study Area 4-18
4-12 Estimated Public Child Care Facility Enrollment, Capacity, and Utilization 4-19
4-13 Hospitals Serving the Project Area 4-20
4-14 Outpatient Facilities Serving the Project Area 4-21
4-15 Police Precincts Serving the Project Area 4-23

4-16 Firehouses Serving the Project Area 4-24
5-1 Total Population Non-Residential Study Area 5-7
5-2 Residential Population Within the Residential Study Area 5-8
5-3 Residential Study Area Population Age Distribution 5-9
5-4 Study Area Quantified Open Space Resources 5-10
5-5 Qualitative Open Space Resources 5-13
5-6 Adequacy of Open Space Resources in the Non-Residential Study Area: Existing Conditions 5-16
5-7 Adequacy of Open Space Resources in the Residential Study Area: Existing Conditions 5-17
5-8 Public Open Space Introduced Regardless of the Proposed Actions 5-20
5-9 Adequacy of Open Space Resources in the Non-Residential Study Area: No Action Condition 5-22
5-10 Adequacy of Open Space Resources in the Residential Study Area: No Action Condition 5-22
5-11 With Action Open Space Study Area Population 5-25
5-12 Open Space Introduced As Part of the Proposed Actions 5-26
5-13 Adequacy of Open Space Resources in the Non-Residential Study Area: With Action Condition 5-27
5-14 Adequacy of Open Space Resources in the Residential Study Area: With Action Condition 5-28
5-15 Open Space Ratio Summary 5-31
6-1 Tier 3 Assessment: Sunlight-Sensitive Resources 6-5
6-2 Incremental Shadow Durations 6-7
7-1 List of Potential and Projected Development Sites Included in the Phase 1a Study Area 7-8
7-2 Previous Archaeological Analyses of the Gowanus Canal Area 7-11
7-3 Conclusions Reached By Previous Archaeological Surveys for Development Sites in the Phase 1a Study Area 7-12
7-4 Summary of Archaeological Sensitivity by Development Site 7-14
7-5 Architectural Resources 7-17
7-6 Projected and Potential Development Sites With Architectural Significance: No Action and With Action Condition Impacts 7-19
7-7 Projected and Potential Development Sites With Archaeological Significance 7-39
7-8 Impacts to Architectural Resources – Rezoning and Study Area 7-41
9-1 Water Quality Data and DEC Standards for Stations GC3 and GC6, 2012–2016 9-9
9-2 Essential Fish Habitat Designated Species in the Vicinity of the Project 9-12
9-3 Vegetation Identified Within the Study Area 9-14
10-1 Assessment of Projected and Potential Development Sites 10-5
11-1 Existing Water Consumption 11-6
11-2 Existing Wastewater Generation on the Projected Development Sites by Subcatchment Area 11-8
11-3 Existing Surface Coverage 11-9

11-4 Flow Volume Matrix: Existing Conditions 11-9
11-5 No Action Condition Water Consumption 11-13
11-6 No Action Condition Surface Coverage 11-14
11-7 Flow Volume Matrix: No Action Condition 11-15
11-8 With Action Condition Water Consumption 11-16
11-9 With Action Condition Wastewater Generation on the Projected Development Sites By Subcatchment Area 11-17
11-10 With Action Condition Surface Coverage 11-18
11-11 Flow Volume Matrix: With Action Condition 11-19
11-12 Number of Flooded Manholes and Total Surface Flooding Volume 11-21
11-13 Detailed Analysis Modeling—Critical Duration Storms 11-21
11-14 Detailed Analysis—Number of Flooded Manhole and Total Surface Flooding Volume 11-24
11-15 Detailed Analysis—CSO Frequency 11-24
11-16 Detailed Analysis—CSO Volume 11-24
11-17 Detailed Analysis—Total Suspended Solids (TSS) Loadings 11-25
12-1 Existing Solid Waste Generation On Projected Development Sites 12-4
12-2 No Action Solid Waste Generation On Projected Development Sites 12-5
12-3 With-Action Solid Waste Generation On Projected Development Sites 12-6
12-4 Comparison of Weekly Solid Waste Generation On Projected Development Sites (Existing, No Action, With Action Conditions) 12-7
13-1 Existing Annual Energy Consumption for the Projected Development Sites 13-4
13-2 No Action Annual Energy Consumption for the Projected Development Sites 13-4
13-3 With Action Annual Energy Consumption for the Projected Development Sites 13-5
14-1 2035 RWCDS No Action and With Action Land Uses Assumed for the Transportation Analyses 14-2
14-2 Number of Impacted Intersections and Lane Groups By Peak Hour 14-3
14-3 Summary of Significantly Impacted Intersections 14-4
14-4 Summary of Significant Subway Station Impacts 14-5
14-5 Summary of Significant Subway Line Haul Impacts 14-5
14-6 Summary of Significant Pedestrian Impacts 14-6
14-7 High Crash Locations 14-7
14-8 Transportation Planning Factors 14-10
14-9 Rwcds Travel Demand Forecast 14-12
14-10 Rwcds Net Incremental Vehicle Trips By Projected Development Site 14-15
14-11 Summary of Net Incremental Peak Hour Trips Generated Under the RWCDS 14-16
14-12 RWCDS Net Incremental Peak Hour Subway Trips By Station 14-18
14-13 Bus Routes Serving the Project Area 14-19
14-14 Net Incremental Bus Trips By Route 14-19

14-15 Intersection Level of Service Criteria 14-22
14-16 Level of Service Criteria for Subway Station Elements 14-23
14-17 Significant Impact Thresholds for Stairways and Passageways 14-24
14-18 Pedestrian Crosswalk/Corner Area and Sidewalk Levels of Service Descriptions . 14-26
14-19 Significant Impact Criteria for Sidewalks With Platooned Flow in a Non-CBD Location14-27
14-20 Significant Impact Criteria for Corners and Crosswalks in a Non-Cbd Location ... 14-28
14-21 Congested Lane Groups At Analyzed Intersections Under Existing Conditions 14-34
14-22 Congested Lane Groups At Analyzed Intersections Under No Action Conditions—Weekday AM Peak Hour 14-37
14-23 Congested Lane Groups At Analyzed Intersections Under No Action Conditions—Weekday Midday Peak Hour 14-38
14-24 Congested Lane Groups At Analyzed Intersections Under No Action Conditions—Weekday PM Peak Hour 14-39
14-25 Congested Lane Groups At Analyzed Intersections Under No Action Conditions—Saturday Peak Hour 14-40
14-26 Congested Lane Groups At Analyzed Intersections Under With Action Conditions—Weekday AM Peak Hour 14-42
14-27 Congested Lane Groups At Analyzed Intersections Under With Action Conditions—Weekday Midday Peak Hour 14-44
14-28 Congested Lane Groups At Analyzed Intersections Under With Action Conditions—Weekday PM Peak Hour 14-45
14-29 Congested Lane Groups At Analyzed Intersections Under With Action Conditions—Saturday Peak Hour 14-47
14-30 Existing Conditions Subway Station Stair Analysis 14-51
14-31 Existing Conditions Subway Station Fare Array Analysis 14-52
14-32 Existing Conditions Escalator Analysis At the Smith-9th Streets Subway Station . 14-52
14-33 Existing Conditions Subway Line Haul Analysis 14-54
14-34 Existing Conditions Local Bus Analysis 14-55
14-35 No Action Subway Station Stair Analysis 14-57
14-36 No Action Subway Station Fare Array Analysis 14-58
14-37 No Action Escalator Analysis At the Smith-9th Streets Subway Station 14-58
14-38 No Action Subway Line Haul Analysis 14-59
14-39 No Action Local Bus Analysis 14-59
14-40 With Action Subway Station Stair Analysis 14-61
14-41 With Action Subway Station Fare Array Analysis 14-62
14-42 With Action Escalator Analysis At the Smith-9th Streets Subway Station 14-62
14-43 With Action Subway Line Haul Analysis 14-64
14-44 With Action Conditions Local Bus Analysis 14-65
14-45 Existing Sidewalk Conditions 14-67

14-46 Existing Crosswalk Conditions 14-69
14-47 Existing Corner Conditions 14-70
14-48 No Action Sidewalk Conditions 14-73
14-49 No Action Crosswalk Conditions 14-75
14-50 No Action Corner Conditions 14-76
14-51 With Action Sidewalk Conditions 14-79
14-52 With Action Crosswalk Conditions 14-81
14-53 With Action Corner Conditions 14-82
14-54 Summary of Motor Vehicle Crash Data 2015-2017 14-86
14-55 Existing Off-Street Public Parking Facilities in the Study Area 14-89
14-56 Existing On-Street Parking Utilization in the Study Area 14-90
14-57 No Action Off-Street Public Parking Capacity, Demand and Utilization Within ¼-Mile of Projected Development Sites 14-92
14-58 No Action On-Street Parking Capacity, Demand and Utilization Within ¼-Mile of Projected Development Sites 14-93
14-59 With Action Net Incremental Weekday Hourly Parking Demand By Land Use 14-94
14-60 With Action Off-Street Public Parking Capacity, Demand and Utilization Within ¼-Mile of Projected Development Sites 14-95
14-61 With Action On-Street Parking Capacity, Demand and Utilization Within ¼-Mile of Projected Development Sites 14-97
15-1 National Ambient Air Quality Standards (NAAQS) 15-6
15-2 Industrial Source Analysis: Relevant Dec Air Guideline Concentrations 15-9
15-3 Maximum Background Pollutant Concentration for Mobile Source Analysis 15-13
15-4 Mobile Source Analysis Sites 15-14
15-5 Maximum Background Pollutant Concentrations 15-17
15-6 Cluster Analysis Sites 15-18
15-7 Industrial Sources Within 400 Feet of A Projected or Potential Development Site 15-20
15-8 Modeled Emission Rates of Existing Industrial Sources 15-22
15-9 Proposed Gsd Industrial Use Categories Analyzed 15-25
15-10 Industrial Source Analysis Emissions Profile 15-27
15-11 Representative Monitored Ambient Air Quality Data 15-30
15-12 Maximum Predicted 8-Hour Average CO No Action Concentrations 15-31
15-13 Maximum Predicted 24-Hour Average PM_{10} No Action Concentrations ($\mu g/m^3$) 15-31
15-14 Maximum Predicted 8-Hour Co With Action Concentrations (ppm) 15-32
15-15 Maximum Predicted 24-Hour Average PM_{10} With Action Concentration ($\mu g/m^3$) 15-32
15-16 Maximum Predicted 24-Hour Average $PM_{2.5}$ With Action and Incremental Concentrations ($\mu g/m^3$) 15-33

15-17 Maximum Predicted Annual Average $PM_{2.5}$ With Action and Incremental Concentrations ($\mu g/m^3$) 15-33
15-18 Heating and Hot Water System Analysis Summary 15-36
15-19 Heating and Hot Water System Analysis—Results for Projected Development Sites. 15-37
15-20 Heating and Hot Water System Analysis—Results for Potential Development Sites.. 15-40
15-21 Cumulative Heating and Hot Water System Analysis Maximum Pollutant Concentrations – Screening Results ($\mu g/m^3$) 15-43
15-22 Cumulative Heating and Hot Water System Analysis Maximum Pollutant Concentrations – Refined Results ($\mu g/m^3$) 15-43
15-23 Maximum Modeled Impacts On Projected and Potential Sites from Industrial Sources ... 15-45
15-24 Estimated Maximum Hazard Index 15-46
15-25 Maximum Modeled Pollutant Concentrations ($\mu g/m^3$) 15-47
16-1 GWP for Major GHGs 16-4
16-2 Vehicle Miles Traveled Per Year—RWCDS 16-9
16-3 Annual Building Operational Emissions—RWCDS 16-10
16-4 Annual Mobile Source Emissions—RWCDS (Metric Tons CO_2e, 2035) 16-10
16-5 Summary of Annual Ghg Emissions—RWCDS (Metric Tons CO_2e) 16-11
17-1 Common Noise Levels 17-2
17-2 Noise Exposure Guidelines for Use in City Environmental Impact Review 17-4
17-3 Required Attenuation Values to Achieve Acceptable Interior Noise Levels 17-4
17-4 Noise Receptor Locations 17-5
17-5 Existing Noise Levels (in dBA) 17-7
17-6 Noise Survey Results from Gowanus Canal CSO Facilities Feis (in dBA) 17-9
17-7 Playground Boundary Noise $L_{eq(1)}$ Noise Levels (in dBA) 17-10
17-8 2035 No Action Condition Noise Levels (in dBA) 17-11
17-9 2035 With Action Condition Noise Levels (in dBA) 17-14
17-10 CEQR Required Attenuation at Noise Measurement Locations (in dBA) 17-16
17-11 Projected Playground With Action Noise and CEQR Required Attenuation (in dBA) .. 17-17
17-12 Minimum Required Attenuation at Development Sites (in dBA) 17-18
17-13 Measured Sound Pressure Levels at the Fodera Guitar Workshop (in dBA) 17-21
20-1 Summary of Primary Agency Construction Oversight 20-5
20-2 Average Incremental Number of Daily Construction Workers and Trucks by Year and Quarter 20-10
20-3 2029 (First Quarter) Peak Incremental Construction Vehicle Trip Projections (in PCEs) . 20-12
20-4 Comparison of 2029 Peak Incremental Construction Vehicle Trips with 2035 Operational Vehicle Trips (in PCEs) 20-13
20-5 2031 (First Quarter) Peak Incremental Construction Vehicle Trip Projections (in PCEs) . 20-14
20-6 2031 (First Quarter) Incremental Peak Hour Construction and Operational Traffic Volumes (in PCEs) 20-15

20-7 Comparison of 2031 Peak (First Quarter) Incremental Construction and Operational Vehicle Trips with 2035 Operational Vehicle Trips (in PCEs).....20-16
20-8 2029 (First Quarter) and 2031 (First Quarter) Construction Worker Parking Accumulation.20-19
20-9 Pollutants for Analysis and Averaging Periods.....20-20
20-10 Maximum Predicted Pollutant Concentrations from Construction Site Sources—2026 Peak Analysis Periods ($\mu g/m^3$).....20-25
20-11 Maximum Predicted Pollutant Concentrations from Construction Site Sources—2025 Peak Analysis Periods ($\mu g/m^3$).....20-25
20-12 Construction Noise Analysis Time Periods.....20-32
20-13 Typical Construction Equipment Noise Emission Levels (dBA).....20-33
20-14 Projected Development Sites 15 and 19 Noise Receptor Locations 20-34
20-15 Projected Development Site 47 Noise Receptor Locations.....20-42
20-16 Projected Development Site 47 Noise Analysis Results in dBA 20-47
20-17 Projected Development Site 15 Noise Analysis Results in dBA 20-53
20-18 Projected Development Site 19 Noise Analysis Results in dBA 20-60
20-19 Maximum Construction L_{10} Noise Levels at Completed Sites (in dBA) 20-67
20-20 Vibration Source Levels for Construction Equipment 20-69
21-1 Summary of Lane Groups/Intersections With Significant Adverse Traffic Impacts ...21-4
21-2 Lane Groups With Unmitigated Significant Adverse Traffic Impacts.....21-4
21-3 Proposed Traffic Mitigation Measures.....21-13
21-4 Action-With-Mitigation Conditions at Impacts Lane Groups Weekday Am Peak Hour 21-15
21-5 Action-With-Mitigation Conditions at Impacted Lane Groups Weekday Midday Peak Hour.....21-16
21-6 Action-With-Mitigation Conditions at Impacted Lane Groups Weekday Pm Peak Hour 21-17
21-7 Action-With-Mitigation Conditions at Impacted Lane Groups Saturday Peak Hour 21-18
21-8 Summary of Significant Subway Station Impacts.....21-19
21-9 Minimum Required Subway Stairway Widening to Mitigate Impacts at the Union Street (R) Station 21-20
21-10 Minimum Increase in Fare Array Capacity to Mitigate Impacts at the Union Street (R) Station 21-20
21-11 Summary of Significant Subway Line Haul Impacts 21-21
21-12 Summary of Significant Pedestrian Impacts 21-22
21-13 Action-With-Mitigation Sidewalk Conditions 21-23
21-14 Action-With-Mitigation Crosswalk Conditions 21-25
21-15 Action-With-Traffic Mitigation Crosswalk Conditions 21-26
21-16 Action-With-Traffic Mitigation Corner Conditions.....21-26
21-17 Maximum Predicted Annual Average $PM_{2.5}$ With Action and Incremental Concentrations With Traffic Mitigation ($\mu g/m^3$) 21-27
22-1 Comparison of RWCDS for Projected Development Sites—With Action vs. Lower Density Alternatives 22-26

22-2 Comparison of Total RWCDS for Projected Development Sites under With Action Conditions vs. Lower Density Alternative 22-26
22-3 Comparison of Incremental Peak Hour Person Trips by Mode Proposed Actions vs. Lower Density Alternative 22-32
22-4 Comparison of Incremental Peak Hour Vehicle Trips by Mode Proposed Actions vs. Lower Density Alternative 22-33
22-5 Comparison of Incremental Peak Hour Pedestrian Trips Proposed Actions vs. Lower Density Alternative 22-34
26-1a Development under Future Discretionary Actions Scenario 26-4
26-1b Incremental Differences between RWCDS With Action and Conceptual With Action 26-4
26-2 Future Discretionary Actions Scenario Travel Demand Forecast 26-17
26-3 Summary of Incremental Vehicle Trips under the Future Discretionary Actions Scenario 26-18
26-4 Summary of Incremental Pedestrian Trips under the Future Discretionary Actions Scenario 26-18

List of Figures

		following page
S-1	Aerial	S-1
S-2	Project Location	S-1
S-3	Existing Zoning	S-15
S-4	Proposed Zoning	S-28
S-5	Mixed-Use District	S-28
S-6	Mandatory Inclusionary Housing	S-28
S-7	City Map Amendments	S-40
S-8	Development Sites	S-45
S-9	Construction Noise Impacts	S-45
1-1	Aerial	1-1
1-2	Project Location	1-1
1-3	Existing Zoning	1-15
1-4	Proposed Zoning	1-28
1-5	Mixed-Use District	1-28
1-6	Mandatory Inclusionary Housing	1-29
1-7	City Map Amendments	1-41
1-8	Development Sites	1-45
2-1	Project Location and Secondary Study Area	2-1
2-2	Primary Study Area Subareas	2-4
2-3	Existing Land Use	2-4
2-4	Existing Zoning	2-12
2-5	Coastal Zone Boundary	2-24
2-6	Southwest Brooklyn Industrial Business Zone	2-25
2-7	Business Improvement Districts	2-25
2-8	No Build Projects	2-28
2-9	Proposed Zoning	2-36
2-10	Special Gowanus Mixed-Use District	2-36
2-11	Mandatory Inclusionary Housing Area	2-37
2-12	City Map Amendments	2-48
3-1	Socioeconomic Study Area	3-2
3-2	Average Household Income	3-20
3-3	Median Household Income	3-20
3-4	New York City Housing Authority (NYCHA) Housing Locations	3-21
4-1	Public Schools Serving the Study Area	4-4
4-2	Public Libraries Serving the Study Area	4-12
4-3	Publicly Funded Childcare Facilities	4-17

4-4 Health Care Facilities 4-20
4-5 Police Precincts 4-23
4-6 Fire Engine Companies 4-24
5-1 Open Space Study Areas 5-4
5-2 Open Space Resources 5-14
5-3 Proposed Waterfront Public Access 5-26
6-1 Tier 1 and Tier 2 Assessment 6-3
6-2 March 21 / September 21 6-6
6-3 March 21 / September 21 6-6
6-4 March 21 / September 21 6-6
6-5 March 21 / September 21 6-6
6-6 March 21 / September 21 6-6
6-7 May 6 / August 6 6-6
6-8 May 6 / August 6 6-6
6-9 May 6 / August 6 6-6
6-10 May 6 / August 6 6-6
6-11 May 6 / August 6 6-6
6-12 May 6 / August 6 6-6
6-13 May 6 / August 6 6-6
6-14 May 6 / August 6 6-6
6-15 June 21 6-6
6-16 June 21 6-6
6-17 June 21 6-6
6-18 June 21 6-6
6-19 June 21 6-6
6-20 June 21 6-6
6-21 June 21 6-6
6-22 December 21 6-6
6-23 December 21 6-6
6-24 December 21 6-6
6-25 December 21 6-6
6-26 March 21 / September 21 6-6
6-27 March 21 / September 21 6-6
6-28 March 21 / September 21 6-6
6-29 March 21 / September 21 6-6
6-30 March 21 / September 21 6-6
6-31 March 21 / September 21 6-6
6-32 May 6 / August 6 6-6
6-33 May 6 / August 6 6-6
6-34 May 6 / August 6 6-6
6-35 May 6 / August 6 6-6
6-36 May 6 / August 6 6-6
6-37 June 21 6-6
6-38 June 21 6-6
6-39 June 21 6-6

6-40 June 21 6-6
6-41 June 21 6-6
6-42 December 21 6-6
6-43 December 21 6-6
6-44 December 21 6-6
6-45 March 21 / September 21 6-6
6-46 May 6 / August 6 6-6
6-47 May 6 / August 6 6-6
6-48 June 21 6-6
6-49 June 21 6-6
6-50 March 21 / September 21 6-6
6-51 March 21 / September 21 6-6
6-52 May 6 / August 6 6-6
6-53 May 6 / August 6 6-6
6-54 June 21 6-6
6-55 June 21 6-6
6-56 December 21 6-6
6-57 December 21 6-6
6-58 March 21 / September 21 6-6
6-59 March 21 / September 21 6-6
6-60 March 21 / September 21 6-6
6-61 May 6 / August 6 6-6
6-62 May 6 / August 6 6-6
6-63 May 6 / August 6 6-6
6-64 June 21 6-6
6-65 June 21 6-6
6-66 June 21 6-6
6-67 December 21 6-6
6-68 December 21 6-6
6-69 May 6 / August 6 6-6
6-70 June 21 6-6
6-71 March 21 / September 21 6-6
6-72 May 6 / August 6 6-6
6-73 June 21 6-6
6-74 March 21 / September 21 6-6
6-75 March 21 / September 21 6-6
6-76 May 6 / August 6 6-6
6-77 June 21 6-6
6-78 December 21 6-6
6-79 December 21 6-6
6-80 May 6 / August 6 6-6
6-81 December 21 6-6
6-82 March 21 / September 21 6-6
6-83 May 6 / August 6 6-6
6-84 May 6 / August 6 6-6

6-85 May 6 / August 6 6-6
6-86 June 21 6-6
6-87 June 21 6-6
6-88 June 21 6-6
6-89 March 21 / September 21 6-6
6-90 June 21 6-6
6-91 December 21 6-6
6-92 December 21 6-6
6-93 March 21 / September 21 6-6
6-94 March 21 / September 21 6-6
6-95 March 21 / September 21 6-6
6-96 May 6 / August 6 6-6
6-97 May 6 / August 6 6-6
6-98 December 21 6-6
6-99 December 21 6-6
7-1a Archaeological Study Area 7-7
7-1b Areas of Archaeological Sensitivity 7-7
7-2 Architectural Resources Location Map 7-8
7-3a Architectural Resources 7-16
7-3b Architectural Resources 7-16
7-3c Architectural Resources 7-16
7-3d Architectural Resources 7-16
7-3e Architectural Resources 7-16
7-3f Architectural Resources 7-16
7-4 Architectural Resources, Development Sites - Rezoning and Study Areas 7-16
7-5 Architectural Resources, Development Sites - Rezoning and Study Areas 7-16
7-6 Architectural Resources, Development Sites - Rezoning and Study Areas 7-16
7-7 Architectural Resources - Rezoning Area 7-16
7-8 Architectural Resources - Rezoning Area 7-16
7-9 Architectural Resources - Rezoning Area 7-16
7-10 Architectural Resources - Rezoning Area 7-16
7-11 Architectural Resources - Rezoning Area 7-16
7-12 Architectural Resources - Study Area 7-16
7-13 Architectural Resources - Study Area 7-16
7-14 Architectural Resources - Study Area 7-16
7-15 Architectural Resources - Study Area 7-16
7-16 Architectural Resources - Study Area 7-16
7-17 Architectural Resources - Study Area 7-16
7-18 Architectural Resources - Study Area 7-16
7-19 Architectural Resources - Study Area 7-16
7-20 Architectural Resources - Study Area 7-16
7-21 Architectural Resources - Study Area 7-16
7-22 Architectural Resources - Study Area 7-16
7-23 Architectural Resources - Study Area 7-16
7-24 Architectural Resources - Study Area 7-16

7-25 Architectural Resources - Study Area 7-16
7-26 Architectural Resources - Study Area 7-16
7-27 Architectural Resources - Study Area 7-16
8-1 Urban Design and Visual Resources Study Areas 8-1
8-2 Urban Design and Visual Resources Aerial Map 8-1
8-3 Primary Study Area Built FAR 8-5
8-4 Secondary Study Area Built FAR 8-4
8-5 Photograph Key Map 8-6
8-6 Primary Study Area Canal Corridor Subarea 8-7
8-7 Primary Study Area Canal Corridor Subarea 8-7
8-8 Primary Study Area Canal Corridor Subarea 8-8
8-9 Primary Study Area Canal Corridor Subarea 8-8
8-10 Primary Study Area Canal Corridor Subarea 8-9
8-11 Primary Study Area Canal Corridor and 4th Avenue Corridor Subareas 8-9
8-12 Primary Study Area 4th Avenue Corridor Subarea 8-10
8-13 Primary Study Area Industrial and Commercial Subarea 8-12
8-14 Primary Study Area Industrial and Commercial Subarea 8-12
8-15 Primary Study Area Industrial and Commercial Subarea 8-13
8-16 Primary Study Area Industrial and Commercial Subarea 8-15
8-17 Primary Study Area Industrial and Commercial Subarea 8-15
8-18 Primary Study Area Residential Subarea 8-15
8-19 Primary Study Area Residential Subarea 8-15
8-20 Primary Study Area Residential and Upland Mixed-Use Subareas 8-16
8-21 Primary Study Area Upland Mixed-Use Subarea 8-16
8-22 Primary Study Area Upland Mixed-Use Subarea 8-16
8-23 Primary Study Area Upland Mixed-Use Subarea 8-17
8-24 Primary Study Area Upland Mixed-Use Subarea 8-17
8-25 Primary Study Area Upland Mixed-Use Subarea 8-18
8-26 Primary Study Area Upland Mixed-Use Subarea 8-18
8-27 Primary Study Area Upland Mixed-Use Subarea 8-19
8-28 Primary Study Area Upland Mixed-Use Subarea 8-20
8-29 Secondary Study Area Park Slope 8-21
8-30 Secondary Study Area Park Slope 8-21
8-31 Secondary Study Area Park Slope 8-21
8-32 Secondary Study Area Downtown Brooklyn 8-22
8-33 Secondary Study Area Boerum Hill 8-24
8-34 Secondary Study Area Carroll Gardens 8-26
8-35 Secondary Study Area Gowanus 8-27
8-36 Secondary Study Area Gowanus 8-28
8-37 Project Area: Existing, No Action, and With Action Conditions Photograph Views 8-28
8-38 Comparison Massing The Gowanus Canal at the Union Street Bridge Facing North 8-28
8-39 Comparison Massing 3rd Street Bridge Facing East 8-28
8-40 Comparison Massing Bond Street at 1st Street Facing North 8-28
8-41 Comparison Massing Smith Street at Luquer Street Facing East 8-28
8-42 Comparison Massing Smith Street at 4th Street Facing South 8-28

8-43 Comparison Massing The Gowanus Canal at the 3rd Street Bridge Facing South 8-28
8-44 Comparison Massing 4th Avenue at Baltic Street Facing North 8-28
8-45 Comparison Massing 4th Avenue at President Street Facing North 8-28
8-46 Comparison Massing 4th Avenue at 6th Street Facing North 8-28
8-47 Comparison Massing Degraw Street between 3rd and 4th Avenue Facing East 8-28
8-48 Comparison Massing Hoyt Street at 4th Street Facing South 8-28
8-49 Comparison Massing 7th Street at 4th Avenue Facing West 8-28
8-50 Comparison Massing 3rd Avenue at Carroll Street Facing North 8-28
8-51 Comparison Massing Nevins Street at President Street Facing South 8-28
8-52 Comparison Massing Baltic Street at Nevins Street Facing West 8-28
8-53 Comparison Massing Union Street at 4th Avenue Facing West 8-28
8-54 Comparison Massing 3rd Avenue at Union Street Facing North 8-28
8-55 Comparison Massing Nevins Street at Douglass Street Facing South toward Thomas Greene Playground 8-28
8-56 Illustrative Rendering of the Gowanus Waterfront Access Plan (WAP) 8-31
8-57 Proposed Zoning with Projected and Potential Development Sites 8-32
8-58 Illustrative Rendering of the Gowanus Canal at Union Street Bridge Facing North 8-32
8-59 Illustrative Rendering of the Gowanus Canal at 3rd Street Bridge Facing North 8-32
8-60 Illustrative Renderings 8-33
8-61 Illustrative Rendering 8-34
8-62 Illustrative Renderings of 4th Avenue South of 2nd Street Facing North 8-36
8-63 Illustrative Rendering of Degraw Street between 3rd and 4th Avenues Facing East 8-37
8-64 Illustrative Rendering of Degraw Street West of 3rd Avenue Facing Southwest 8-39
9-1 FEMA Preliminary FIRM 9-6
9-2 NWI Wetlands 9-6
9-3 NYSDEC Tidal Wetlands 9-6
9-4 DEP Harbor Survey Stations 9-7
9-5 Photograph Key 9-13
9-6a Site Photographs 9-13
9-6b Site Photographs 9-13
9-6c Site Photographs 9-13
9-6d Site Photographs 9-13
10-1 Gowanus Superfund Sites 10-16
11-1 DEP Stormwater Management Practices Hierarchy 11-2
11-2 Gowanus Canal Sewershed 11-7
11-3 WWTP Subcatchment Areas 11-8
11-4 DEP Infrastructure Improvements 11-10
11-5 Gowanus Canal High Level Storm Sewers (HLSS) 11-11
11-6 Green Infrastructure (GI) Projects in Gowanus Canal Watershed 11-11
11-7 Gowanus Canal CSO Facilities 11-11
11-8 Summary of CSO Volumes Change due to Rezoning (MGY) 11-20
11-9 Summary of CSO Volume Change 11-25
11-10 Summary of CSO Volume Change 11-25
14-1 Projected Development Sites 14-16
14-2 Project Area Subway Stations 14-17

14-3 Project Area Bus Routes 14-18
14-4a Analyzed Pedestrian Elements 14-20
14-4b Analyzed Pedestrian Elements 14-20
14-5 Study Area Bicycle Network 14-33
14-6 Existing AM Peak Hour Traffic Volumes 14-33
14-7 Existing Midday Peak Hour Traffic Volumes 14-33
14-8 Existing PM Peak Hour Traffic Volumes 14-33
14-9 Existing Saturday Peak Hour Traffic Volumes 14-33
14-10 No Action AM Peak Hour Traffic Volumes 14-36
14-11 No Action Midday Peak Hour Traffic Volumes 14-36
14-12 No Action PM Peak Hour Traffic Volumes 14-36
14-13 No Action Saturday Peak Hour Traffic Volumes 14-36
14-14 Street Network Changes under the Proposed Actions 14-36
14-15 AM Peak Hour Project Increment Traffic Volumes 14-41
14-16 Midday Peak Hour Project Increment Traffic Volumes 14-41
14-17 PM Peak Hour Project Increment Traffic Volumes 14-41
14-18 Saturday Peak Hour Project Increment Traffic Volumes 14-41
14-19 With Action AM Peak Hour Traffic Volumes 14-41
14-20 With Action Midday Peak Hour Traffic Volumes 14-41
14-21 With Action PM Peak Hour Traffic Volumes 14-41
14-22 With Action Saturday Peak Hour Traffic Volumes 14-41
14-23 Bergen Street (F/G) Subway Station 14-49
14-24 Carroll Street (F/G) Subway Station 14-50
14-25 Smith-9th Streets (F/G) Subway Station 14-50
14-26 Union Street (R) Subway Station 14-52
14-27 Study Area Existing Off-Street Parking Facilities 14-88
15-1 Air Quality Mobile Source Analysis Sites 15-13
15-2 Potential Clusters 15-18
17-1 Noise Measurement Locations 17-5
19-1 Neighborhood Character 19-3
20-1 Conceptual Construction Schedule 20-6
20-2 Construction Noise Impacts 20-66
22-1 Lower Density Alternative 22-25
26-1 Conceptual Development Sites 26-3
26-2 Tier 1 and Tier 2 Assessment 26-10
26-3 Shadows—Tier 3 Assessment December 21 26-11
26-4 Shadows—Tier 3 Assessment March 21/September 21 26-11
26-5 Shadows—Tier 3 Assessment May 6/August 6 26-11
26-6 Shadows—Tier 3 Assessment June 21 26-11

✶