
Starrett-Lehigh and Terminal Warehouse

Draft Environmental Impact Statement

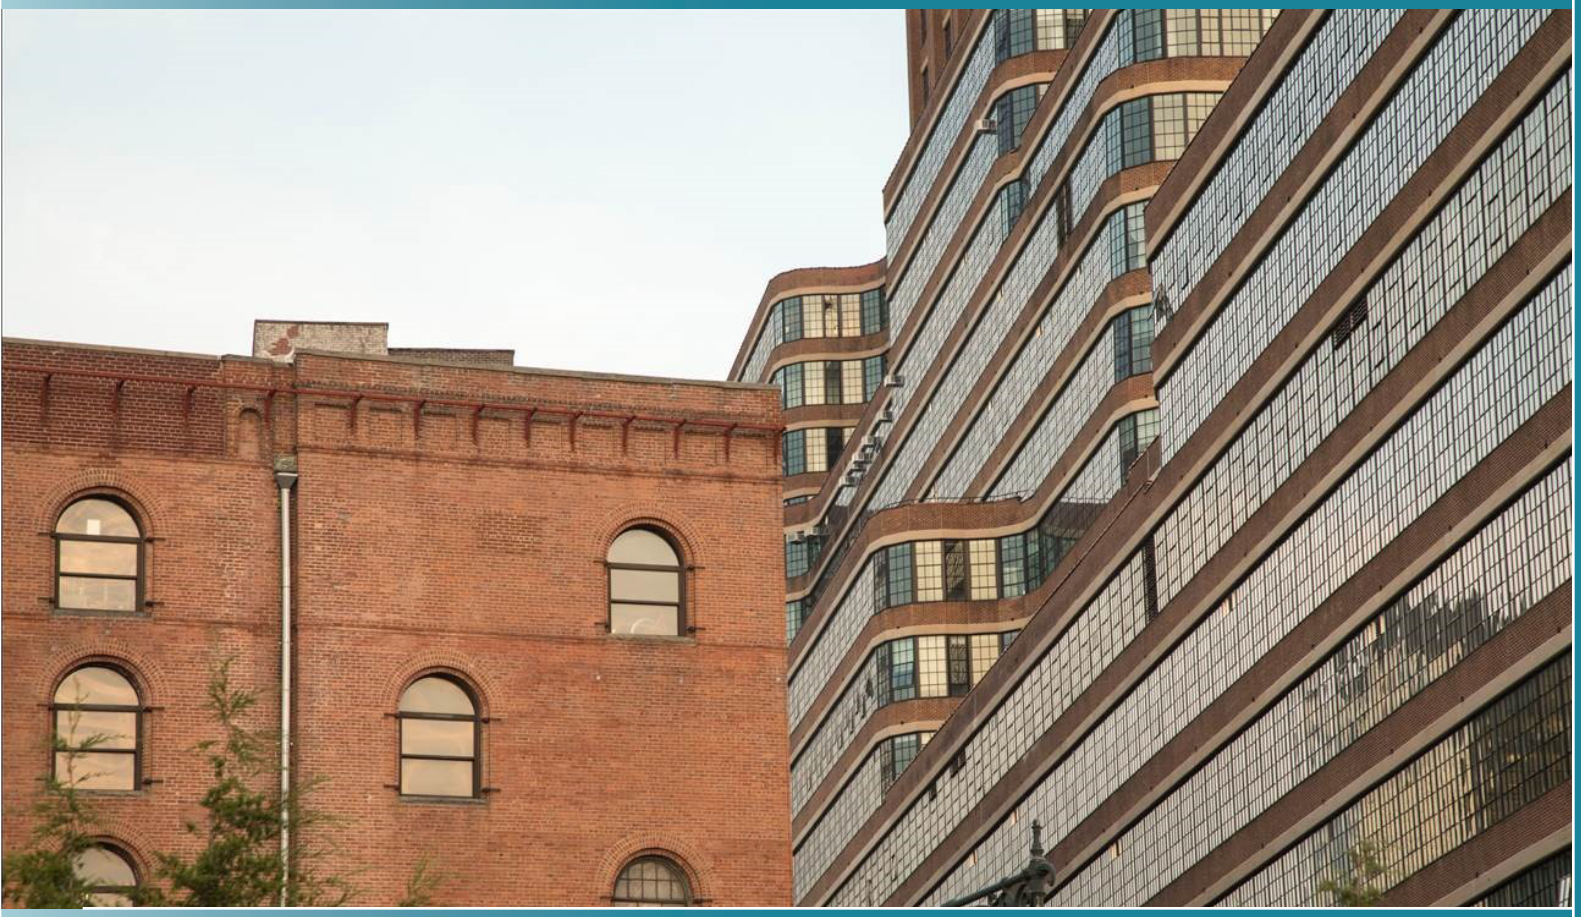

CEQR No. : 21DCP103M | ULURP Nos. : 210408ZMM 210409ZRM

Lead Agency:
City Planning Commission
City of New York
Marisa Lago, Chair

Prepared by:
vhb

June 21, 2021

Starrett-Lehigh and Terminal Warehouse

Draft Environmental Impact Statement (DEIS)

Project Location:	Community District 4, Manhattan
CEQR No.	21DCP103M
Type of Action:	Type 1
ULURP Nos.	210408ZMM, 210409ZRM
Lead Agency:	City Planning Commission, City of New York Marisa Lago, Chair
Lead Agency Contact:	Olga Abinader Director, Environmental Assessment and Review Division New York City Department of City Planning 120 Broadway, 31st Floor New York, NY 10271-3100 212-720-3493
Project Applicants:	RXR SL Owner LLC and Terminal Fee Owner LP
Prepared by:	VHB One Penn Plaza, Suite 715 New York, NY 10119-0800 212-857-7350
Acceptance Date:	June 21, 2021

A public hearing on the Draft Environmental Impact Statement (DEIS) will be held at a later date to be announced. Advance notice will be given of the time and place of the hearing. Written comments on the DEIS are requested and will be received and considered by the Lead Agency until the 10th calendar day following the close of the public hearing.

The DEIS is available on the website of the New York City Department of City Planning http://www1.nyc.gov/site/planning/applicants/eis-documents.page.

Table of Contents

Section Page

Executive Summary 1

Introduction 1
Project Area, Project Area History, and Description of Surrounding Area 1
Starrett-Lehigh Building 1
Terminal Warehouse 1
Project Area History and Description of Surrounding Area 4
Proposed Actions 5
Purpose and Need for the Proposed Actions 6
Analysis Framework and Reasonable Worst-Case Development Scenario 6
Analysis Year 6
Reasonable Worst-Case Development Scenario (RWCDS) 6
Identification of Development Sites 7
Future Without the Proposed Actions (No-Action Condition) 7
Future With the Proposed Actions (With-Action Condition) 8
Principal Conclusions of Environmental Analysis 8
Historic Resources 8
Hazardous Materials 9
Transportation 9
Air Quality 10
Noise 11
Public Health 11
Neighborhood Character 12
Mitigation 13
Unavoidable Significant Adverse Impacts 14
Alternatives 14
Growth-Inducing Aspects of the Proposed Project 15
Irreversible and Irretrievable Commitments of Resources 16

Project Description 1-1

Introduction 1-1
Project Area, Project Area History, and Description of Surrounding Area 1-2
Starrett-Lehigh Building 1-2
Terminal Warehouse Building 1-4
Project Area History and Description of Surrounding Area 1-6
Proposed Actions 1-7
Purpose and Need for the Proposed Actions 1-8
Analysis Framework and Reasonable Worst-Case Development Scenario 1-8
Analysis Year 1-9
Reasonable Worst-Case Development Scenario (RWCDS) 1-9
Identification of Development Sites 1-10

Future Without the Proposed Actions (No-Action Condition) *1-10*
Future With the Proposed Actions (With-Action Condition) *1-11*
Public Review Process 1-11
City Environmental Quality Review (CEQR) *1-12*

Historic and Cultural Resources 2-1

Introduction 2-1
Principal Conclusions 2-2
Archaeological Resources *2-2*
Architectural Resources *2-2*
Methodology 2-2
Archaeological Resources *2-3*
Architectural Resources *2-3*
Assessment 2-4
Existing Conditions *2-4*
No Action Condition *2-22*
With Action Condition *2-23*

Hazardous Materials 3-1

Introduction 3-1
Principal Conclusions 3-2
Methodology 3-2
Assessment 3-3
Existing Conditions *3-3*
No-Action Condition *3-21*
With-Action Condition *3-22*

Transportation 4-1

Introduction 4-1
Principal Conclusions 4-3
Methodology 4-4
Level 1 Screening Assessment *4-4*
Level 1 Screening Results *4-9*
Level 2 Screening Assessment *4-10*
Level 2 Screening Results *4-14*
Detailed Analysis Methodologies 4-26
Traffic *4-26*
Parking *4-28*
Transit *4-28*
Pedestrians *4-31*
Vehicle and Pedestrian Safety *4-34*
Existing Conditions 4-35
Traffic *4-35*
Parking *4-44*
Buses *4-46*
Subways *4-47*

Pedestrians *4-51*
Vehicular and Pedestrian Safety *4-61*
No-Action Conditions 4-63
Traffic *4-66*
Parking *4-74*
Buses *4-77*
Subways *4-78*
Pedestrians *4-81*
With-Action Conditions 4-91
Traffic *4-91*
Parking *4-104*
Buses *4-107*
Subways *4-108*
Pedestrians *4-111*

Air Quality 5-1

Introduction 5-1
Principal Conclusions 5-2
Air Quality Standards 5-2
Regulatory Context 5-4
Pollutants of Concern 5-4
Impact Criteria 5-5
Background Concentrations 5-6
Mobile Source Screening Analysis Approach 5-6
Existing Conditions 5-7
Mobile Source Assessment 5-8
No-Action Condition *5-8*
With-Action Condition *5-8*

Noise 6-1

Introduction 6-1
Principal Conclusions 6-2
Existing Noise Receptors *6-2*
New Noise Receptors *6-2*
Noise Background 6-3
Assessment Methodology 6-5
Noise Assessment Methodology for Existing Receptors (Mobile Sources) *6-5*
Noise Assessment Methodology for New Receptors *6-5*
Noise Assessment at Existing Receptors (Mobile Source Noise Analysis) 6-6
Noise Assessment at New Receptors 6-9
Existing Sound Levels *6-9*
No-Action and With-Action Sound Levels *6-11*
Building Sound Attenuation *6-14*

Public Health 7-1

Introduction 7-1
Principal Conclusions 7-2
Methodology 7-2
Assessment 7-2
Hazardous Materials *7-2*
Air Quality *7-3*
Noise *7-3*

Neighborhood Character 8-1

Introduction 8-1
Principal Conclusions 8-1
Methodology 8-2
Preliminary Assessment 8-4
Identification of the Defining Features of the Neighborhood—Existing Conditions *8-4*
No-Action Condition *8-5*
With-Action Condition *8-6*

Mitigation 9-3

Introduction 9-3
Principal Conclusions 9-4
Traffic *9-4*
Transit *9-4*
Pedestrians *9-4*
Transportation 9-5
Traffic *9-5*
Transit *9-16*
Pedestrians *9-17*

Unavoidable Significant Adverse Impacts 10-1

Introduction 10-1
Transportation 10-1
Traffic *10-1*
Transit *10-2*
Pedestrians *10-2*

Alternatives 11-1

Introduction 11-1
Principal Conclusions 11-2
No-Action Alternative *11-2*
No Unmitigated Significant Adverse Impacts Alternative *11-3*
No-Action Alternative 11-3
Description of the No-Action Alternative *11-3*
Historic and Cultural Resources *11-3*
Hazardous Materials *11-4*

Transportation *11-5*
Air Quality *11-5*
Noise *11-6*
Public Health *11-6*
Neighborhood Character *11-6*
No Unmitigated Significant Adverse Impact Alternative 11-6

Growth-Inducing Aspects of the Proposed Actions 12-1

Introduction 12-1
Principal Conclusions 12-2

Irreversible and Irretrievable Commitments of Resources 13-1

Principal Conclusions 13-1

Appendices

Appendix A ..... LPC Correspondence

List of Tables

Table No.	Description	Page
Table 1	Comparison of Uses in the With-Action and No-Action Conditions (RWCDS for Analysis) in GSF	7
Table 1-1	Comparison of Uses in the With-Action and No-Action Conditions (RWCDS for Analysis) in GSF	1-10
Table 2-1	Known Architectural Resources within 400-foot Radius	2-9
Table 3-1	Site Reconnaissance Summary	3-9
Table 4-1	Reasonable Worst-Case Development Scenario (in gsf)	4-2
Table 4-2	Travel Demand Assumptions	4-5
Table 4-3	Project Trip Generation Summary – Person Trips	4-9
Table 4-4	Project Trip Generation Summary – Vehicle Trips	4-10
Table 4-5	Project-Generated Person Trips by Bus	4-14
Table 4-6	Project-Generated Person Trips by Subway	4-15
Table 4-7	Level of Service Criteria for Subway Station Elements	4-29
Table 4-8	Level of Service Criteria for Stairs and Passageways	4-30
Table 4-9	Level of Service Criteria for Pedestrian Elements	4-32

Table 4-10 Significant Impact Criteria for Sidewalks 4-33
Table 4-11 Significant Impact Criteria for Corners and Crosswalks 4-34
Table 4-12 Existing Traffic Level of Service Summary – Overall Intersections 4-39
Table 4-13 Existing Traffic Level of Service Summary – Traffic Movements 4-39
Table 4-14 Existing Traffic Level of Service Summary 4-40
Table 4-15 Off-Street Parking Inventory 4-46
Table 4-16 Existing Bus Line-Haul Capacity 4-47
Table 4-17 Existing Subway Station Level of Service – Stairs 4-49
Table 4-18 Existing Subway Station Level of Service – Escalators 4-49
Table 4-19 Existing Subway Station Level of Service – Fare Control Area 4-50
Table 4-20 Existing Subway Line - Haul Capacity 4-51
Table 4-21 Existing Pedestrian Levels of Service Summary 4-56
Table 4-22 Existing Pedestrian Levels of Service – Sidewalks 4-57
Table 4-23 Existing Pedestrian Levels of Service – Crosswalks 4-59
Table 4-24 Existing Pedestrian Levels of Service – Corners 4-60
Table 4-25 Vehicle, Pedestrian, and Bicycle Crash Data 4-62
Table 4-26 No-Action Development Projects 4-66
Table 4-27 No-Action Traffic Level of Service Summary – Overall Intersections 4-69
Table 4-28 No-Action Traffic Level of Service Summary – Traffic Movements 4-69
Table 4-29 No-Action Traffic Level of Service Summary 4-70
Table 4-30 No-Action Project Increment – Weekday Off-Street Parking Demand 4-75
Table 4-31 No-Action Project Increment – Saturday Off-Street Parking Demand 4-76
Table 4-32 No-Action Off-Street Parking Utilization 4-77
Table 4-33 No-Action Bus Line-Haul Capacity 4-78
Table 4-34 No-Action Subway Station Level of Service – Stairs 4-79
Table 4-35 No-Action Subway Station Level of Service – Escalators 4-79
Table 4-36 No-Action Subway Station Level of Service – Fare Control Area 4-80
Table 4-37 No-Action Subway Line-Haul Capacity 4-80
Table 4-38 No-Action Pedestrian Levels of Service Summary 4-86
Table 4-39 No-Action Pedestrian Levels of Service – Sidewalks 4-87
Table 4-40 No-Action Pedestrian Levels of Service – Crosswalks 4-89
Table 4-41 No-Action Pedestrian Levels of Service – Corners 4-90

Table 4-42 With-Action Traffic Level of Service Summary – Overall Intersections 4-94
Table 4-43 With-Action Traffic Level of Service Summary – Traffic Movements 4-94
Table 4-44 With-Action Traffic Level of Service Summary – Weekday PM Peak Hour 4-95
Table 4-45 With-Action Traffic Level of Service Summary – Saturday Peak Hour..... 4-98
Table 4-46 With-Action Project Increment – Weekday Off-Street Parking Demand 4-105
Table 4-47 With-Action Project Increment – Saturday Off-Street Parking Demand 4-106
Table 4-48 With-Action Off-Street Parking Utilization 4-106
Table 4-49 With-Action Bus Line-Haul Capacity Analysis 4-107
Table 4-50 With-Action Subway Station Level of Service – Stairs 4-109
Table 4-51 With-Action Subway Station Level of Service – Escalators 4-109
Table 4-52 With-Action Subway Station Level of Service – Fare Control Area 4-110
Table 4-53 With-Action Subway Line-Haul Capacity 4-111
Table 4-54 With-Action Pedestrian Levels of Service Summary 4-117
Table 4-55 With-Action Pedestrian Levels of Service – Sidewalks (Weekday AM and Midday) 4-118
Table 4-56 With-Action Pedestrian Levels of Service – Sidewalks (Weekday PM and Saturday) 4-120
Table 4-57 With-Action Pedestrian Levels of Service – Crosswalks (Weekday AM and Midday) 4-122
Table 4-58 With-Action Pedestrian Levels of Service – Crosswalks (Weekday PM and Saturday) 4-123
Table 4-59 With-Action Pedestrian Levels of Service – Corners (Weekday AM and Midday) 4-124
Table 4-60 With-Action Pedestrian Levels of Service – Corners (Weekday PM and Saturday) 4-125
Table 5-1 National Ambient Air Quality Standards 5-3
Table 5-2 Background Concentrations 5-6
Table 5-3 Existing Monitored Concentrations (2017-2019) 5-7
Table 6-1 Common Indoor and Outdoor Sound Levels 6-4
Table 6-2 Noise Exposure Guidelines for Use in City Environmental Impact Review 6-6
Table 6-3 Passenger Car Equivalents 6-7
Table 6-4 2020 Measured Sound Levels 6-11

Table 6-5	2024 No-Action Sound Levels	6-12
Table 6-6	2024 With-Action Sound Levels	6-12
Table 6-7	Sound Level Acceptability, Dba	6-13
Table 6-8	Required Attenuation Values	6-14
Table 9-1	Traffic Impact Mitigation Summary	9-5
Table 9-2	Summary of Impacted Traffic Movements	9-5
Table 9-3	No-Action vs With-Action vs Mitigation Traffic Levels of Service Comparison – Weekday PM Peak Hour	9-6
Table 9-4	No-Action vs With-Action vs Mitigation Traffic Levels of Service Comparison – Saturday Peak Hour	9-11
Table 9-5	Escalator Level of Service Summary Comparison	9-17
Table 9-6	Summary of Elements with Significant Adverse Pedestrian Impacts	9-18
Table 9-7	Sidewalk Impact Mitigation Summary	9-18
Table 9-8	Crosswalk Impact Mitigation Summary	9-19

List of Figures

Figure No.	Description	Page
Figure 1	Project Area Location	1
Figure 1-1	Project Area Location	1-3
Figure 2-1	Historic Resources Map	2-8
Figure 4-1	Project Area	4-2
Figure 4-2	Transit Map	4-12
Figure 4-3	Weekday AM Peak Hour Project-Generated Pedestrian Trips	4-16
Figure 4-4	Weekday Midday Peak Hour Project-Generated Pedestrian Trips	4-17
Figure 4-5	Weekday PM Peak Hour Project-Generated Pedestrian Trips	4-18
Figure 4-6	Saturday Peak Hour Project-Generated Pedestrian Trips	4-19
Figure 4-7	Pedestrian Analysis Locations	4-20
Figure 4-8	Weekday Midday Peak Hour Project-Generated Vehicle Trips	4-22
Figure 4-9	Weekday PM Peak Hour Project-Generated Vehicle Trips	4-23
Figure 4-10	Saturday Midday Peak Hour Project-Generated Vehicle Trips	4-24
Figure 4-11	Traffic Analysis Locations	4-25

Figure 4-12 Existing Weekday PM Peak Hour Traffic Volumes 4-37
Figure 4-13 Existing Saturday Peak Hour Traffic Volumes 4-38
Figure 4-14 Off-Street Parking Facilities 4-45
Figure 4-15 Existing Weekday AM Peak Hour Pedestrian Volumes 4-52
Figure 4-16 Existing Weekday Midday Peak Hour Pedestrian Volumes 4-53
Figure 4-17 Existing Weekday PM Peak Hour Pedestrian Volumes 4-54
Figure 4-18 Existing Saturday Midday Peak Hour Pedestrian Volumes 4-55
Figure 4-19 No-Action Development Sites 4-65
Figure 4-20 No-Action Weekday PM Peak Hour Traffic Volumes 4-67
Figure 4-21 No-Action Saturday Midday Peak Hour Traffic Volumes 4-68
Figure 4-22 No-Action Weekday AM Peak Hour Pedestrian Volumes 4-82
Figure 4-23 No-Action Weekday Midday Peak Hour Pedestrian Volumes 4-83
Figure 4-24 No-Action Weekday PM Peak Hour Pedestrian Volumes 4-84
Figure 4-25 No-Action Saturday Midday Peak Hour Pedestrian Volumes 4-85
Figure 4-26 With-Action Weekday PM Peak Hour Traffic Volumes 4-92
Figure 4-27 With-Action Saturday Midday Peak Hour Traffic Volumes 4-93
Figure 4-28 With-Action Weekday AM Peak Hour Pedestrian Volumes 4-113
Figure 4-29 With-Action Weekday Midday Peak Hour Pedestrian Volumes 4-114
Figure 4-30 With-Action Weekday PM Peak Hour Pedestrian Volumes 4-115
Figure 4-31 With-Action Saturday Midday Peak Hour Pedestrian Volumes 4-116
Figure 6-1 Noise Monitoring Locations 6-10

List of Photos

Photo No.	Description	Page
Photo 1	Starrett-Lehigh Building	2
Photo 2	No-Action Condition: Starrett-Lehigh Building	2
Photo 3	Terminal Warehouse Building	3
Photo 4	No-Action Condition: Terminal Warehouse	3
Photo 2-1	Starrett-Lehigh (1939)	2-7
Photo 2-2	New York Terminal Warehouse (1939)	2-7

Photo 2-3 W&J Sloane Warehouse and Garage (2020) 2-11
Photo 2-4 W&J Sloane Warehouse and Garage (1939) 2-11
Photo 2-5 270 and 262 Eleventh Avenue (2020) 2-11
Photo 2-6 270 and 262 Eleventh Avenue (1939) 2-11
Photo 2-7 554 West 28th Street (2020) 2-12
Photo 2-8 554 West 28th Street (1939) 2-12
Photo 2-9 Berlin & Jones Envelope Company (2020) 2-12
Photo 2-10 Berlin & Jones Envelope Company (1939) 2-12
Photo 2-11 Jno. Williams Inc, 536-544 West 27th Street (2020) 2-15
Photo 2-12 Jno. Williams Inc, 537-544 West 26th Street (1939) 2-15
Photo 2-13 Otis Elevator Company (2020) 2-15
Photo 2-14 Otis Elevator Company (1939) 2-15
Photo 2-15 Jno. Williams Inc, 549 West 26th Street (2008) 2-16
Photo 2-16 Jno. Williams Inc, 549 West 26th Street (1939) 2-16
Photo 2-17 Jno. Williams Inc, 537-547 West 26th Street (2008) 2-16
Photo 2-18 Jno. Williams Inc, 537-547 West 26th Street (1939) 2-16
Photo 2-19 Standard Oil Company (2020) 2-17
Photo 2-20 Standard Oil Company (1939) 2-17
Photo 2-21 547 West 25th Street (2008) 2-17
Photo 2-22 547 West 25th Street (1939) 2-17
Photo 2-23 Zinn Building (2020) 2-20
Photo 2-24 Zinn Building (1939) 2-20
Photo 2-25 B&O Railroad Freight House (2008) 2-20
Photo 2-26 B&O Railroad Freight House (1939) 2-20
Photo 2-27 B&O Float Transfer Bridge and Frying Pan Shoals Lightship (2020) 2-21
Photo 2-28 B&O Float Transfer Bridge and Frying Pan Shoals Lightship (2014) 2-21
Photo 2-29 Frying Pan Shoals Lightship (2020) 2-21
Photo 2-30 Frying Pan Shoals Lightship (1998) 2-21
Photo 2-31 John H. Harvey Fireboat (2020) 2-22
Photo 2-32 John H. Harvey Fireboat (n.d.) 2-22